

# ATKOMATIC

## 15-794 Series

Stainless Steel, Pilot-piston, Pressure 5 to 350 psig (.4 to 24 bar)  
Liquid CO<sub>2</sub> Valve



### Features

- Designed specifically for liquid CO<sub>2</sub>
- Pilot operated valve
- Pressure to 350 psig (24 bar)
- 1/2" NPT ports
- Cv of 3.0
- Stainless steel construction
- Teflon® piston (seat material)
- Teflon® body seal
- Coil housing is waterproof and nickel plated
- Class H and Class B coils are available
- No other options available

### Operational Pressures (5 psid minimum pressure differential)

LIQUID CARBON DIOXIDE	
AC	DC
350	350

### Circle Seal Controls

2301 Wardlow Circle • P.O. Box 3300 • Corona, CA 92880

Phone (951) 270-6200 Fax (951) 270-6201


www.circlesealcontrols.com • am\_sales@circlesealcontrols.com • ind\_sales@circlesealcontrols.com

atkomatic solenoid

# 15-794 Series

## Dimensions, Shipping Weights, and Cv Flow Factors

CATALOG NUM. PREFIX	PIPE SIZE	X	Y	Z	SHIPPING WEIGHT (lbs)	Cv
15-794	1/2"	5 1/4"	3 3/8"	2 3/8"	4	3

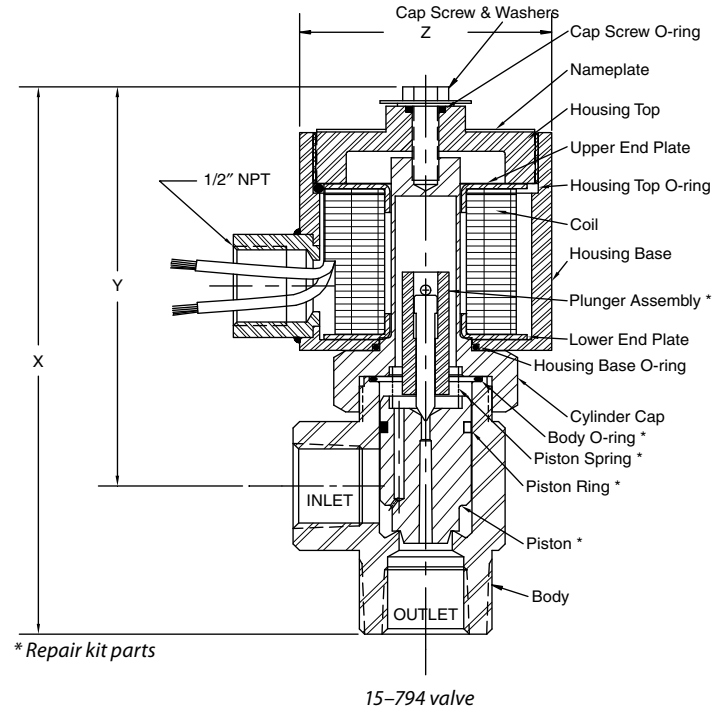

## How to Order

**15-794 -** x x x x

### VOLTAGE AC/60 Hz

- |                     |                     |
|---------------------|---------------------|
| <b>0</b> DC voltage | <b>5</b> 230-60 VAC |
| <b>1</b> 24-60 VAC  | <b>6</b> 460-60 VAC |
| <b>2</b> 100-60 VAC | <b>7</b> 110-50 VAC |
| <b>3</b> 115-60 VAC | <b>8</b> 220-50 VAC |
| <b>4</b> 200-60 VAC | <b>9</b> 380-50 VAC |

### CONNECTION TYPE

- P** NPT
- J** British pipe thread

### COIL INSULATION RATING

- B** Class B 155° C
- H** Class H 188° C

### VOLTAGE DC

- 0** AC voltage
- 1** 12 VDC
- 2** 24 & 32 VDC
- 3** 48 VDC
- 4** 100 VDC
- 5** 125 VDC
- 6** 250 VDC